


For a complete overview of our products visit us on the internet

<http://www.noeding-messtechnik.de/>



Noeding Messtechnik GmbH is ISO 9001 certified. Many of our products are ATEX and / or DNV-GL certified.

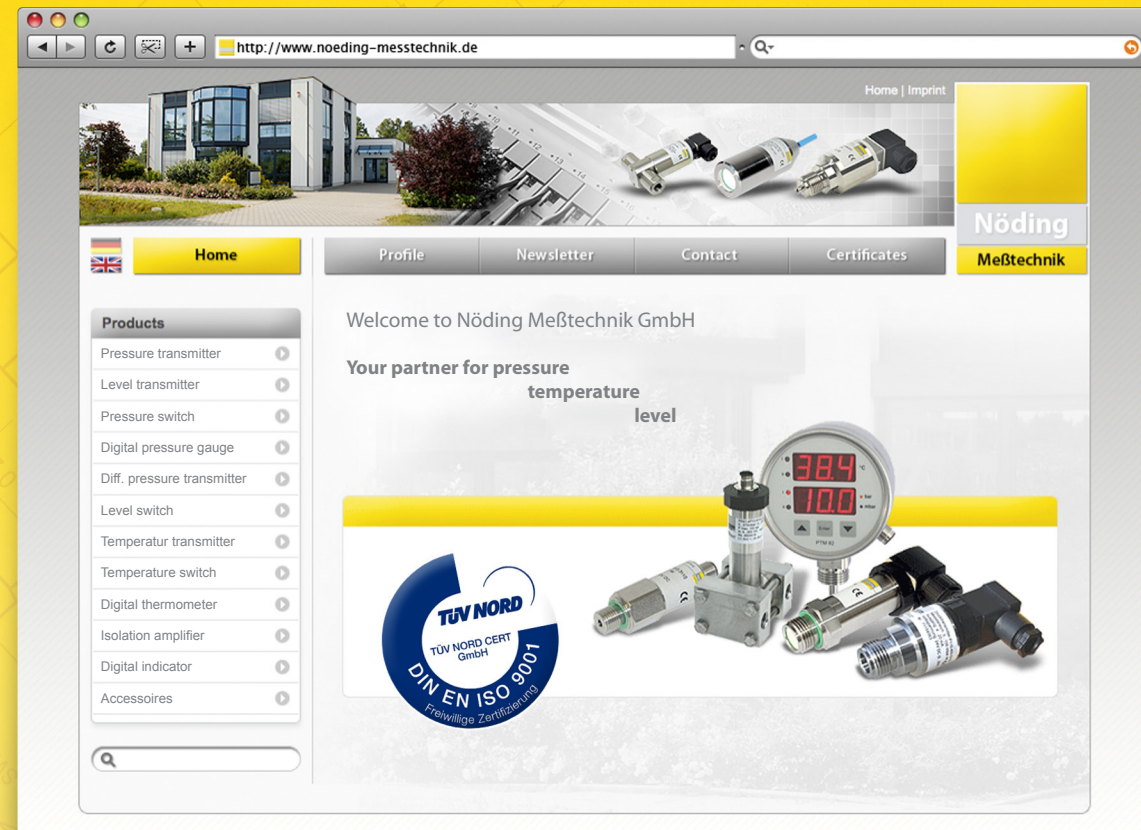

Nöding

Meßtechnik GmbH

Pressure transmitter, Differential pressure transmitter, Level sensors, Pressure switches, Digital gauges

Nöding
Meßtechnik



Nöding Meßtechnik GmbH

Oldenfelder Bogen 29 • D-22143 Hamburg

Tel.: +49 40 675851-0 • Fax: +49 40 675851-49

info@noeding-messtechnik.de

Edition 10

*Individual, customer-focused solutions
with high precision*

Nöding Meßtechnik – Product overview

Pressure transmitter

Easy installation, range factory set, ready for immediate use. Robust and reliable.

- **Ranges from** 0...40 mbar to 250 bar
- Large number of **pressure** and **electrical connections**
- Accuracy **up to 0,1% FS**
- **High overload capacity**, max 100 times
- **ATEX certification** and **GL approval** available for selected models
- **All major output signals**, specials on request



P 121



P 10



P 12



P 131

Digital gauges

Digital contact gauges for pressure and temperature.

- **Analog output** and up to 2 PNP contact outputs or 2 relays
- **Ranges from** 0...25 mbar to 0...250 bar
- **Easy installation**, optional swivel connection
- **User adjustable** set-points
- **PIN protection** against unauthorised adjustments
- **Min/Max memory** for process control / surveillance
- **IP67 protection**



PTM 82



PM 82



PM 63




PM 82-3

Level transmitter

A combination of different cable, housing and sealing materials allow a perfect match for your application. Reliable and accurate ceramic sensors with long-term stability provide an excellent performance. Short delivery times.

- **Ranges from** 0...40 mbar to 0...60 bar / 0.4 to 600 mWC
- Very good **temperature stability**
- **Fully welded** stainless steel cases are available
- Optional fully integrated **PT100-/PT1000-temperature sensors** are available
- **ATEX certification** and **GL approval** available for selected models
- Housing materials of **PP** and **PVDF** are available for selected models

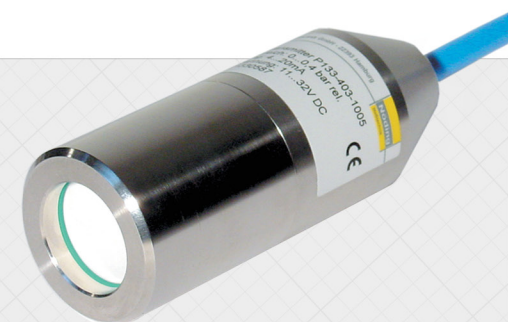

P 133



P 137



P 139



P 135

Differential pressure transmitter

Very high overload capability at low ΔP -ranges. Small in design and rugged.

- **ΔP -span from** 50 mbar to 25 bar
- **One side overload capability** of 250 bar at the smallest span of 50 mbar
- **Level monitoring** of pressurized tanks
- **Reliable monitoring** of filtration plants
- **IP67 protection**

PD 40



PDM 80-2



PD 41



PD 81